

MEGI® Bars


Megi Bars

For large orders, metal-rubber bars can be supplied with metal plates of a different thickness "s" and with a thinner rubber layer.

Metal rubber bars can also be supplied as impact plates, that is with a metal plate on one side only to meet special production orders.

DIN 1017 applies for metal parts.


The appropriate thickness tolerances for Megi bars are given in DIN ISO 3302 - M3.

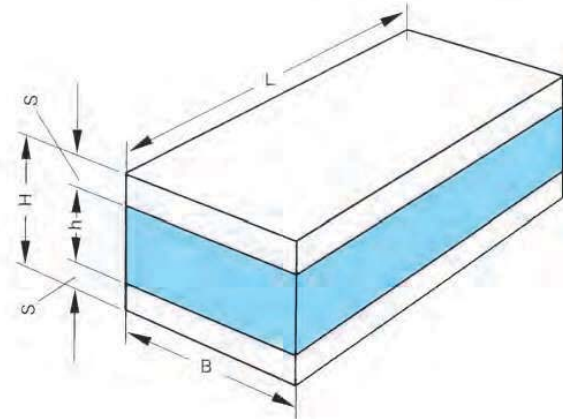


B	H	h	s	Available in lengths of	Part No.
20	30	20	5	500 mm	781 210
25	30	20	5	500 mm	781 211
40	35	19	8	500 mm	781 212
50	40	20	10	2000 mm	781 314
50	50	30	10	2000 mm	781 315

B	H	h	s	Available in lengths of	Part No.
60	60	40	10	2000 mm	781 324
70	50	30	10	2000 mm	781 330
100	60	30	15	2000 mm	781 333
100	80	50	15	2000 mm	781 334
150	65	35	15	2000 mm	781 338
150	80	50	15	2000 mm	781 339

Spring rate for compression stress c_D

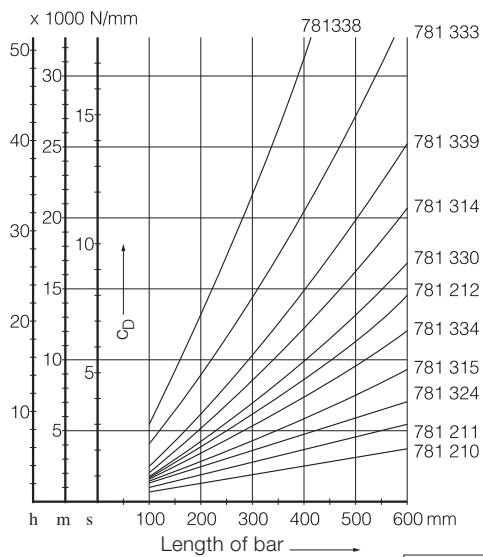

Spring rate for compression stress c_S

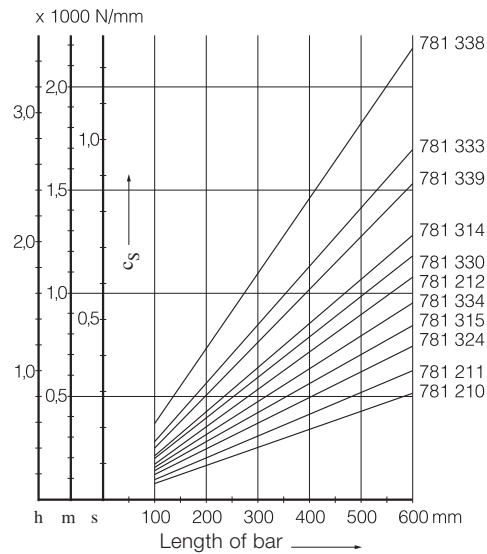

Other dimensions and materials are available on request