


# SCHWINGMETALL® Railstrips

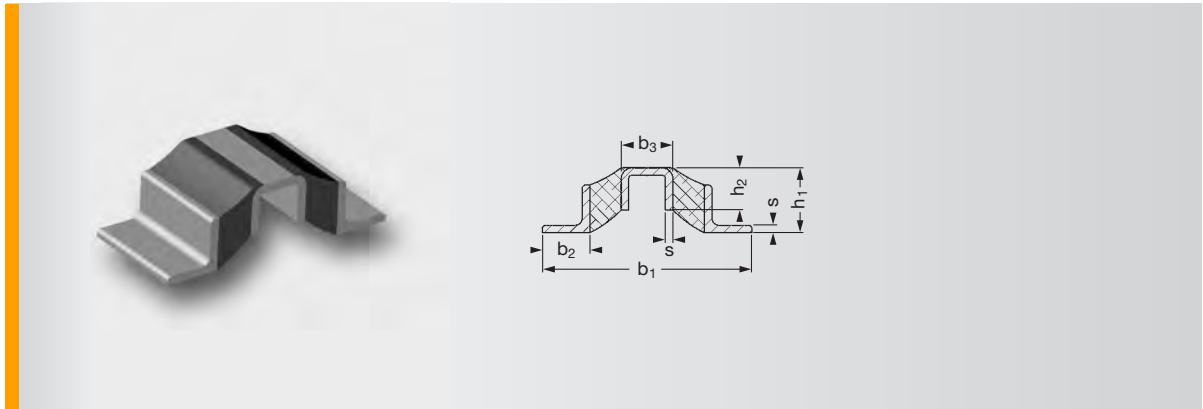

Railstrips U-Shaped 20302																
Mould No.	Part No.	Dimensions							Spring Stiffness 1)		max. Loads 1)		Min. Natural Frequency 2)	Mass	Elas-tomer	
		b1 [mm]	b2 [mm]	b3 [mm]	h1 [mm]	h2 [mm]	Length [mm]	s [mm]	C <sub>x</sub> [N/mm]	C <sub>y,z</sub> [N/mm]	F <sub>x</sub> [N]	F <sub>y,z</sub> [N]	f <sub>e</sub> min <sup>-1</sup>	Piece [kg]	Hardness [Shore A]	
20302	3966404000	110	25	27	34	22	2000	4	42	14	80	42	604	11.64	40	
20302	3966204000	110	25	27	34	22	2000	4	65	25	130	65	588	11.64	55	
20302	3966104000	110	25	27	34	22	2000	4	118	38	160	118	581	11.64	65	

1) The indicated stiffness and maximum loads refer to a railstrip 10 mm long.

2) The minimal natural frequency values refer to maximum loads.