


SCHWINGMETALL® Hydromounts

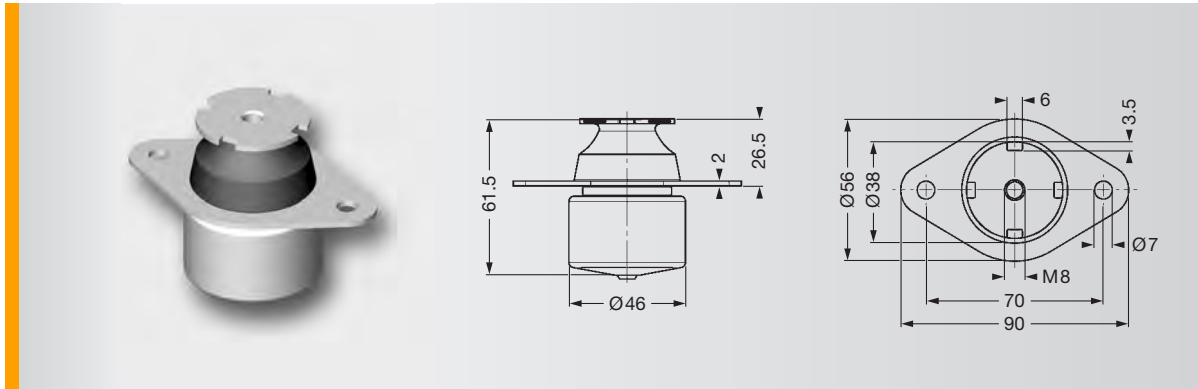

Hydromount V 250

Hydro-mount	Mould No.	Part No.	Spring Stiffness				Max. Loads			Pull-Out Strength [kN]	Mass Piece [kg]	Elastomer Hardness [Shore A]
			C_x [N/mm]	C_y [N/mm]	C_z [N/mm]	C_{dyn} [N/mm]	F_x [N]	F_y [N]	F_z [N]			
V 250	102216	3978814001	15	15	49	250	77	77	300	> 3	0.200	40

- ▶ Maximum permitted slanted position to direction of loading is 15°
- ▶ The fastening flange must be entirely supported outside of the mount

Characteristic Curves Hydromount V 250

40 Shore A

