



# FS 200-10 CI S ECO<sup>2</sup> Single Convolution Air Actuator



Service instructions  
3/8-16 UNC: 27 Nm  
1/4-18 NPT: 27 Nm

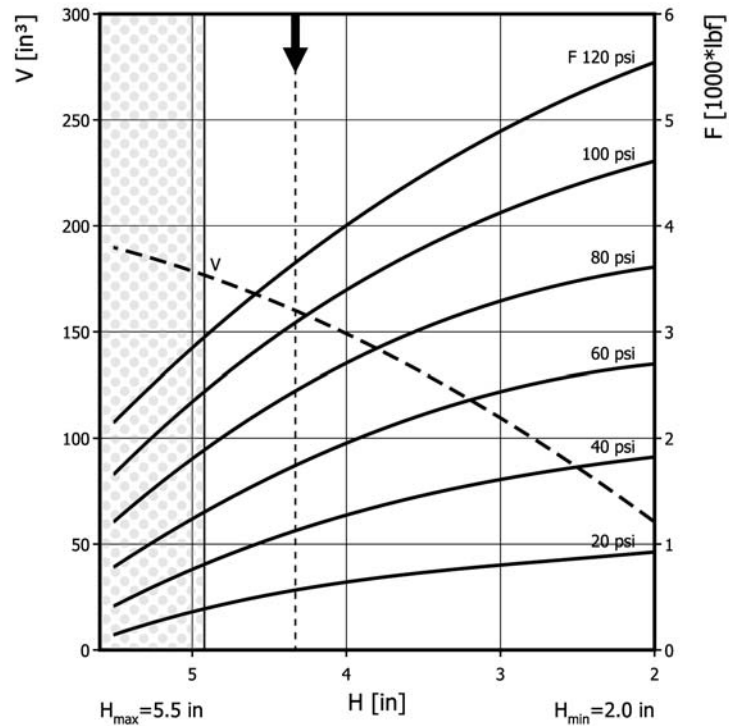

Use in dotted range >4.92 in. only after consultation with ContiTech

Recommended height for vibration isolation: 4.33 in.


## Purchase order data

Type	Order No.
ECO rubber bellows only	75769
with clamped plates,	75969

## Technical data

Min. pressure	0 bar
Return force to min height	≤ 200 N
Overall weight with clamped plates	2.6 kg

## Top Plate



## Bottom Plate

