



FS 330-11 ECO² Single Convolution Air Actuator



Service instructions
 3/8-16 UNC: 27 Nm
 1/4-18 NPT: 27 Nm

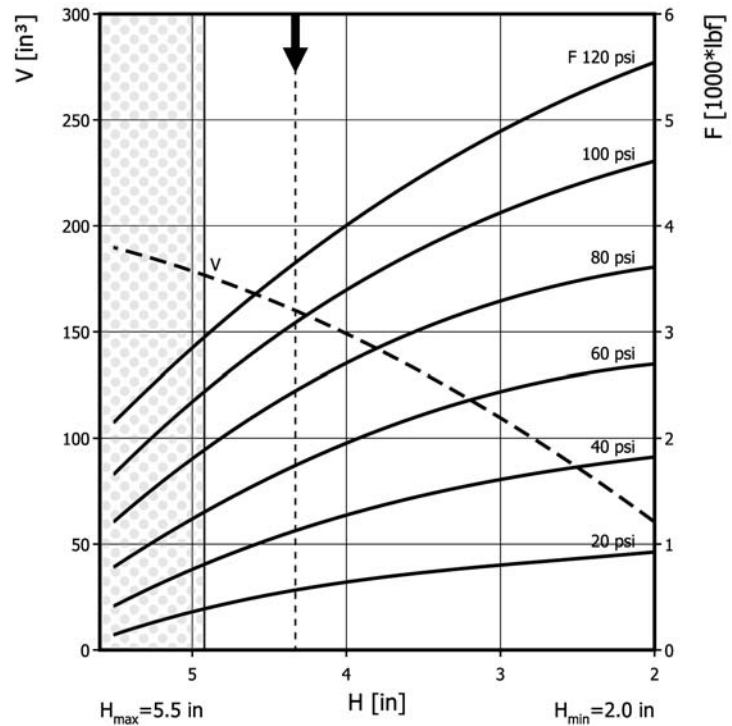

Use in dotted range >4.92 in. only after consultation with ContiTech

Recommended height for vibration isolation: 4.33 in.


Purchase order data

Type	Order No.
ECO rubber bellows only	75772
with clamped plates,	68397

Technical data

Min. pressure	0 bar
Return force to min height	≤ 300 N
Overall weight with clamped plates	3.9 kg

Top Plate



Bottom Plate

