


FS 70-7 S ECO²


Single Convolution Air Actuator



Service instructions

M8: 25 Nm

G1/4: 25 Nm

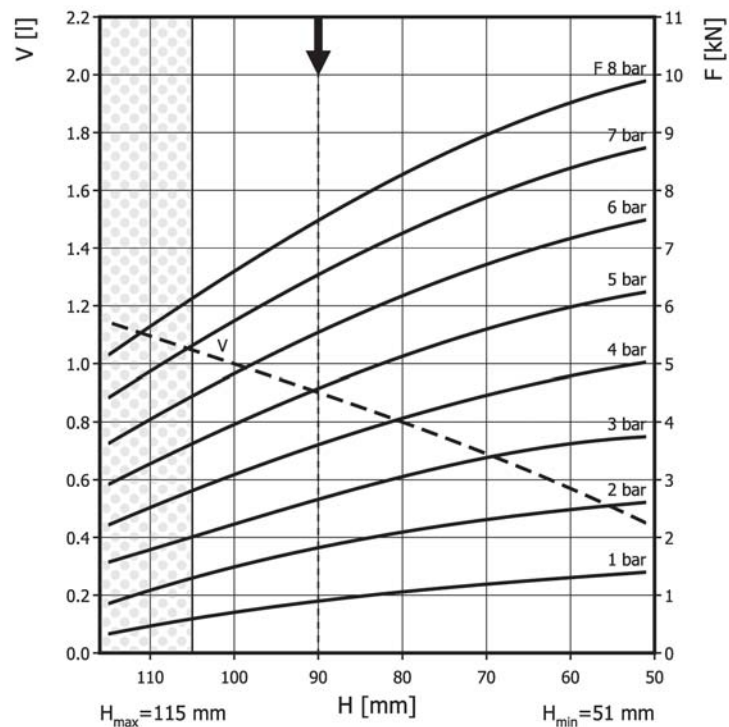

Use in dotted range >105 mm only after consultation with ContiTech

Recommended height for vibration isolation: 90 mm


Purchase order data

Type	Order No.
ECO rubber bellows only	75764
with stainless steel crimped plates, G1/4 air inlet	79117

Technical data

Min. pressure	0 bar
Return force to min height	≤ 200 N
Overall weight with clamped plates	1.4 kg

Top Plate



Bottom Plate

