
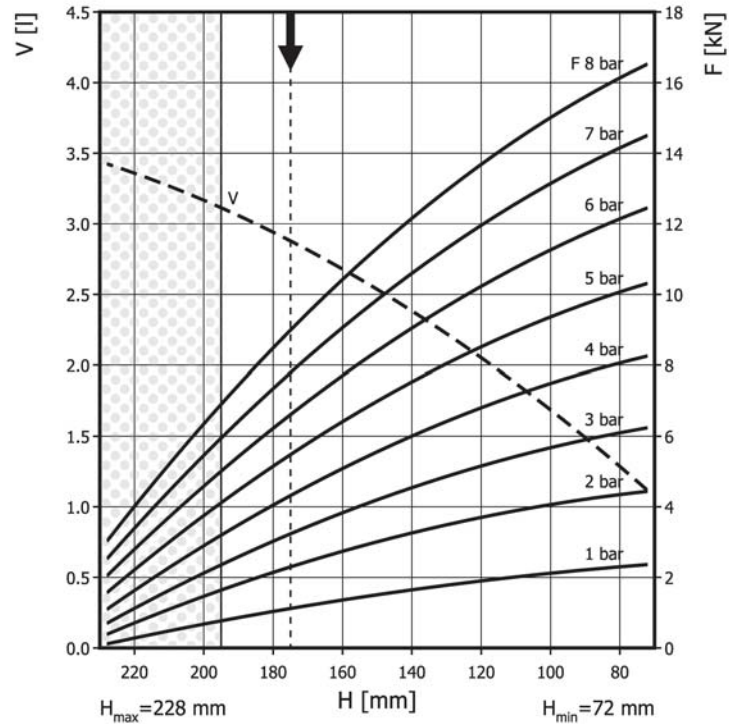


FD 110-15 CI ECO Double Convolution Air Actuator

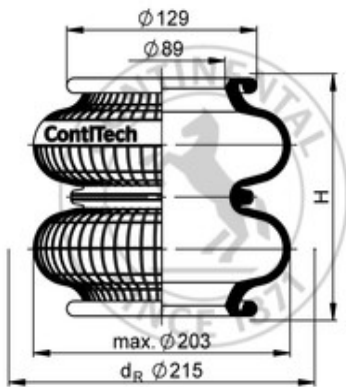

Service instructions
M8: 25 Nm
G3/4: 50 Nm

Use in dotted range >195 mm only after consultation with ContiTech

Recommended height for vibration isolation: 175 mm


Purchase order data

Type	Order No.
ECO rubber bellows only	75780
with clamped plates, G3/4 air inlet 0 mm excentrical	63249

Technical data

Min. pressure	0 bar
Return force to min height	≤ 200 N
Overall weight with clamped plates	2.5 kg

Top Plate



Bottom Plate

