
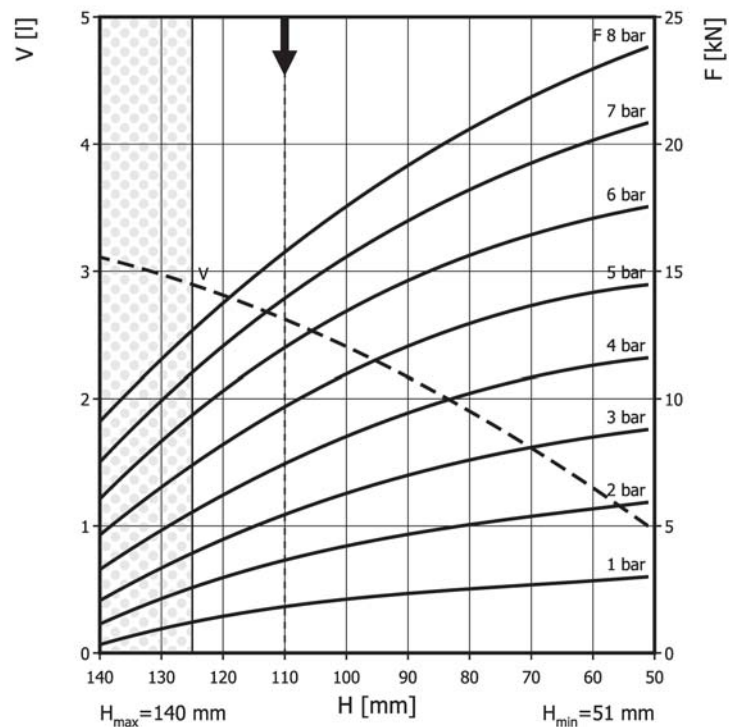


FS 200-10 CI ECO Single Convolution Air Actuator



Service instructions

M8: 25 Nm

G1/4: 50 Nm

Use in dotted range >125 mm only after consultation with ContiTech



Recommended height for vibration isolation: 110 mm


Purchase order data

Type	Order No.
ECO rubber bellows only	75769
with clamped plates, G3/4 air inlet 0 mm excentrical	62113

Technical data

Min. pressure	0 bar
Return force to min height	≤ 200 N
Overall weight with clamped plates	2.5 kg

Top Plate



Bottom Plate

