
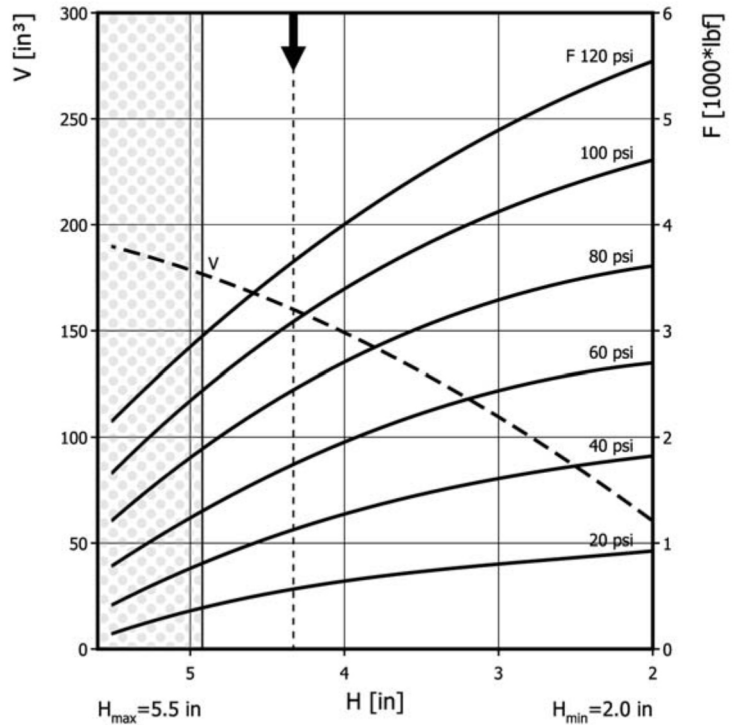


# FS330-11 ECO

# Single Convolution Air Actuator



Service instructions  
 3/8-16 UNC: 27 Nm  
 1/4-18 NPT: 27 Nm

Use in dotted range >4.92 in. only after consultation with ContiTech

Recommended height for vibration isolation: 4.33 in.


### Purchase order data

### Technical data


Type	Order No.
ECOrubber bellows only	75772
with clamped plates,	68397

Min. pressure	0 bar
Return force to min height	≤ 300 N
Overall weight with clamped plates	3.9 kg

### Top Plate



### Bottom Plate



Air Spring Systems | 17/07/2019

Measuring procedure: Room temperature / Force-height-data quasistatic / Dynamic data at 1 Hz