
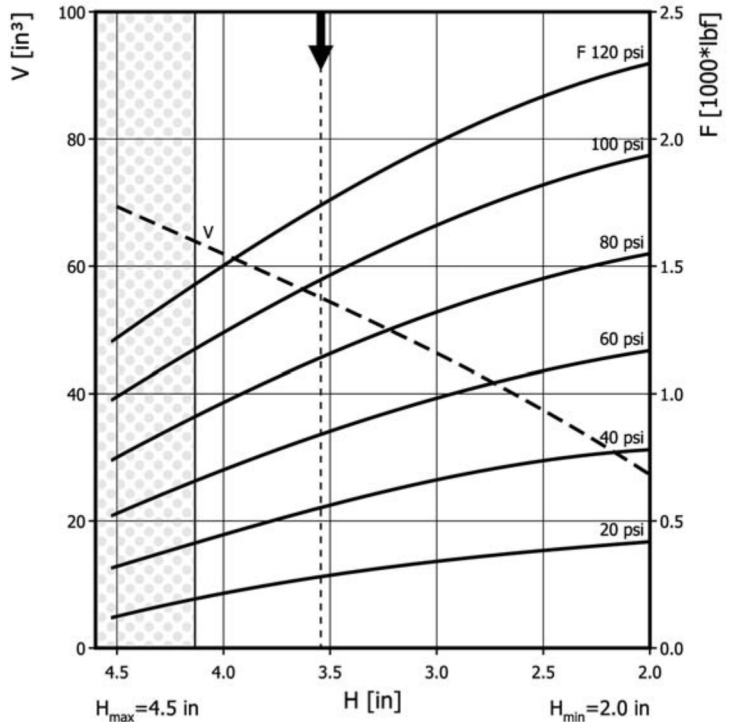


FS 70-7 S ECO

Single Convolution Air Actuator



Service instructions
 3/8-16 UNC: 27 Nm
 1/4-18 NPT: 27 Nm

Use in dotted range >4.13 in. only after consultation with ContiTech



Recommended height for vibration isolation: 3.54 in.


Purchase order data

Type	Order No.
ECORubber bellows only	75764
with clamped plates,	62973


Technical data

Min. pressure	0 bar
Return force to min height	≤ 200 N
Overall weight with clamped plates	1.4 kg

Top Plate



Bottom Plate



Air Spring Systems | 22/02/2019

Measuring procedure: Room temperature / Force-height-data quasistatic / Dynamic data at 1 Hz